


TIRAS FLEXIBLES MONOCOLOR 30 LEDS/m 5050 IP66

SINGLE-COLOR FLEXIBLE STRIPS 30 LEDS/m 5050 IP66

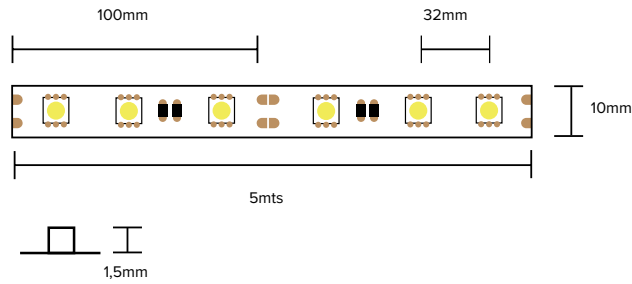

Medida / Size	5000x10x1,5mm
Corte / Cut	100mm
*Longitud máx. recomendada / *Max. recommended length	9mts

Referencia Reference	Temp. Color Color Temp.	Flujo luminoso Lumen output	Densidad Density	Tipo LED Led type	Voltaje Tensión	Potencia Power	IP IP
TF5R-AP-IP66		180lm/m	30leds/m	5050	12V _{DC}	7,2W/m	66
TF5AB-AP-IP66		180lm/m	30leds/m	5050	12V _{DC}	7,2W/m	66
TF5AZ-AP-IP66		225lm/m	30leds/m	5050	12V _{DC}	7,2W/m	66
TF5V-AP-IP66		360lm/m	30leds/m	5050	12V _{DC}	7,2W/m	66
TF5BF-AP-IP66	6000 K	585lm/m	30leds/m	5050	12V _{DC}	7,2W/m	66
TF5BD-AP-IP66	4000 K	570lm/m	30leds/m	5050	12V _{DC}	7,2W/m	66
TF5BC-AP-IP66	3000 K	550lm/m	30leds/m	5050	12V _{DC}	7,2W/m	66
TF5BSC-AP-IP66	2700 K	540lm/m	30leds/m	5050	12V _{DC}	7,2W/m	66
TF5-AP-2300K-IP66	2300 K	530lm/m	30leds/m	5050	12V _{DC}	7,2W/m	66

Fuente de alimentación recomendada para un rollo de 5mts: LRS5012 (12V 50W) / Recommended power supply for a 5mts roll: LRS5012 (12V 50W)

*Longitud máxima de corte recomendado: - Sección cable: 0.75mm² - Longitud cableado máximo: 5mts

*Maximum recommended cutting length: - Cable section: 0.75mm² - Maximum cable length: 5mts