


TIRAS FLEXIBLES MONOCOLOR 60 LEDS/m 5050 IP66

SINGLE-COLOR FLEXIBLE STRIPS 60 LEDS/m 5050 IP66

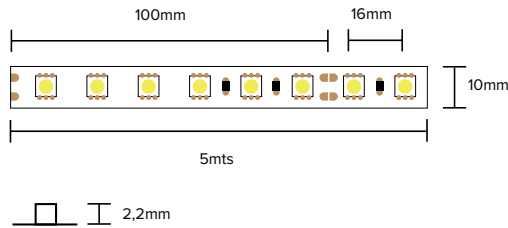

Medida / Size	5000x10x2,2mm
Corte / Cut	100mm
*Longitud máx. recomendada / *Max. recommended length	5mts

Referencia Reference	Temp. Color Color Temp.	Flujo luminoso Lumen output	Densidad Density	Tipo LED Led type	Voltaje Tensión	Potencia Power	IP IP
TF5R-AP-300-IP66		360lm/m	60leds/m	5050	24V _{DC}	14,4W/m	66
TF5AB-AP-300-IP66		360lm/m	60leds/m	5050	24V _{DC}	14,4W/m	66
TF5AZ-AP-300-IP66		450lm/m	60leds/m	5050	24V _{DC}	14,4W/m	66
TF5V-AP-300-IP66		720lm/m	60leds/m	5050	24V _{DC}	14,4W/m	66
TF5BF-AP-300-IP66		1610lm/m	60leds/m	5050	24V _{DC}	14,4W/m	66
TF5BD-AP-300-IP66		1560lm/m	60leds/m	5050	24V _{DC}	14,4W/m	66
TF5BC-AP-300-IP66		1550lm/m	60leds/m	5050	24V _{DC}	14,4W/m	66
TF5BSC-AP-300-IP66		1480lm/m	60leds/m	5050	24V _{DC}	14,4W/m	66
TF5-AP-300-2300K-IP66		1450lm/m	60leds/m	5050	24V _{DC}	14,4W/m	66

Fuente de alimentación recomendada para un rollo de 5mts: LRS10024 (24V 100W) / Recommended power supply for a 5mts roll: LRS10024 (24V 100W)

*Longitud máxima de corte recomendado: - Sección cable: 0.75mm² - Longitud cableado máximo: 5mts

*Maximum recommended cutting length: - Cable section: 0.75mm² - Maximum cable length: 5mts