


EMPOTRABLE DE SUELO 116mm

RECESSED INGROUND 116mm

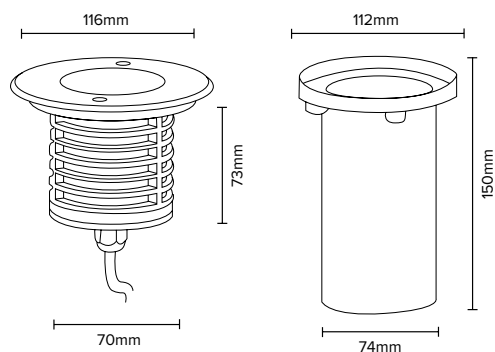

IP67

Referencia <i>Reference</i>	Temp. Color <i>Color Temp.</i>	Tipo LED <i>LED type</i>	Flujo luminoso <i>Lumen output</i>	Alimentación <i>Power Supply</i>	Ángulo <i>Angle</i>	Consumo <i>Power</i>	Medidas <i>Size</i>	IP <i>IP</i>
ES3X2S-BF	6000 K	Cree	479lm/m	220-240V _{AC}	Simétrico 22° / <i>Symmetric 22°</i>	6W	116x73mm	67
ES3X2S-BC	3000 K	Cree	376lm/m	220-240V _{AC}	Simétrico 22° / <i>Symmetric 22°</i>	6W	116x73mm	67
ES3X2S-RGB	RGB	Cree	R48/G79/B20	24V _{DC}	Simétrico 20° / <i>Symmetric 20°</i>	10W	116x73mm	67
ES3X2A-BF	6000 K	Cree	479lm/m	220-240V _{AC}	Asimétrico 45-35° / <i>Asymmetric 45-30°</i>	6W	116x73mm	67
ES3X2A-BC	3000 K	Cree	376lm/m	220-240V _{AC}	Asimétrico 45-35° / <i>Asymmetric 45-35°</i>	6W	116x73mm	67
ES3X2A-RGB	RGB	Cree	R48/G79/B20	240V _{DC}	Asimétrico 50-35° / <i>Asymmetric 50-35°</i>	10W	116x73mm	67