


TIRAS FLEXIBLES MONOCOLOR 60 LEDS/m 3528 IP66

SINGLE-COLOR FLEXIBLE STRIPS 60 LEDS/m 3528 IP66

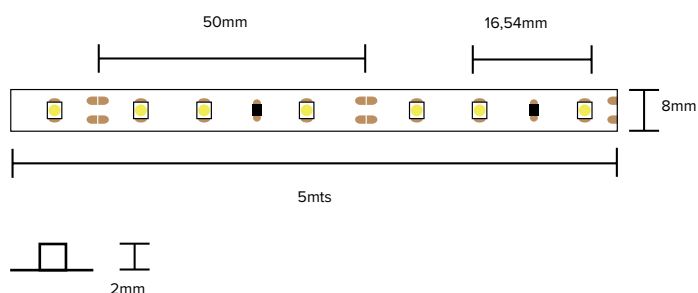

Medida / Size	5000x8x2mm
Corte / Cut	50mm
*Longitud máx. recomendada /	10mts
*Max. recommended lenght	

Referencia <i>Reference</i>	Temp. Color <i>Color Temp.</i>	Flujo luminoso <i>Lumen output</i>	Densidad <i>Density</i>	Tipo LED <i>Led type</i>	Voltaje <i>Tensión</i>	Potencia <i>Power</i>	IP <i>IP</i>
TF5RIP66		120lm/m	60leds/m	3528	12V _{DC}	4,8W/m	66
TF5ABIP66		120lm/m	60leds/m	3528	12V _{DC}	4,8W/m	66
TF5AZIP66		150lm/m	60leds/m	3528	12V _{DC}	4,8W/m	66
TF5VIP66		240lm/m	60leds/m	3528	12V _{DC}	4,8W/m	66
TF5BFIP66		390lm/m	60leds/m	3528	12V _{DC}	4,8W/m	66
TF5BDIP66		380lm/m	60leds/m	3528	12V _{DC}	4,8W/m	66
TF5BCIP66		360lm/m	60leds/m	3528	12V _{DC}	4,8W/m	66
TF5BCIP66		340lm/m	60leds/m	3528	12V _{DC}	4,8W/m	66

Fuente de alimentación recomendada para un rollo de 5mts: LRS3512 (12V 35W) / *Recommended power supply for a 5mts roll: LRS3512 (12V 35W)*

*Longitud máxima de corte recomendado: - Sección cable:0.75mm² - Longitud cableado máximo: 5mts

*Maximum recommended cutting length: - Cable section: 0.75mm² - Maximum cable length: 5mts